

Design and Development of COA-Leach: A well-organized Energy Hypothesize Constructed on Energy Price Demonstrating in Wireless Sensor Network

S. Ravichandran¹ and M. Umamaheswari²

¹Research Scholar in Department of Computer Science,
Bharathiar University, Coimbatore, Tamil Nadu, India

²Professor in Department of Information Technology,
RRASE College of Engineering, Chennai, Tamil Nadu, India

E-mail: ¹ravi17raja@gmail.com. ¹karpagaravi15@gmail.com

²druma_cs@yahoo.com

(Received 3 March 2017; Revised 20 March 2017; Accepted 7 April 2017; Available online 16 April 2017)

Abstract - Wireless Sensor Network (WSN) consists of huge collection of small, battery-powered sensor nodes. Advancements in the WSN give a new scope and dimension for implementing WSN in real-time applications. WSN is inexpensively implemented in the desired area to monitor space, things, and the interaction between the things and encompassing space such as surveillance, intelligent alarm, pipeline and location monitoring, natural disaster monitoring, etc. For processing, transmission and aggregation of data for the aforementioned monitoring functions, nodes consume more energy. This becomes a daunting challenge for WSN, since WSNs are limited with the limited power, processing time and storage capacity. In order to overcome resource constraints, authors of this article proposed a new comprehensive energy postulate that depends on the energy cost modeling named Cyclic Optimized Approach-LEACH (COA-LEACH). The model is constructed through thorough examinations of energy spend in a working WSN for deployment. The decision made in the deployment of nodes explicitly affects the sensing quality as well as the energy consumption of the entire network. Authors mainly focused on the self-rearrange for identification of the neighbor, which is useful for the energy conservation. The proposed generalized model is validated by experimented through spotting toxic gas and also authors in sighted the energy requirement for both the existing and proposed energy model.

Keywords: Wireless sensor network, node deployment, Poisson distribution, energy model, data aggregation, lifetime of sensor nodes.

I. INTRODUCTION

The rapid deployment, self-organization, fault tolerance characteristics of WSN make it applicable for various applications in the recent past. Following is the few real time applications where sensor networks are deployed effectively. To avoid human presence during scientific observations Mainwaring et al. proposed a wireless sensor network to observe the habitat and behavioral patterns of some wild life animals. Likewise, for monitoring large diameter, bulk-water transmission pipeline, hydraulic and acoustic sensors are used by Stoianov *et al.* Other real time applications of WSN are precision agriculture, underground mining, health monitoring and many more.

WSN are optimized depending on the nature of sensing area and also based on the deployment. While studying the implementation details of above-mentioned application, it is observed that there are some concerns in common among all the applications. Following are those concerns that are addressed by the real-time applications. Namely, Time Synchronization, High resolution of sample data, Periodic sensing and sleeping, high sampling rate for short distance and Multi-hop communication. In addition to the above observation, authors also observed that each application develops its own protocol to address the preceding concerns. Though it is widely implemented its limited lifetime is the most prevalent concern. In order to perform the operations in sensor nodes the battery power is used to accomplish the task of the corresponding application.

There is a significant hurdle in deployment and the size of the network since sensor nodes use exhaustible, rechargeable or replacing batteries. Because of this reason author of suggested that WSN can be implemented occasionally for the inspection of pipelines and buildings. To overcome this drawback plenty of communication protocols and data processing algorithms were developed based on optimization of the network lifetime, data processing algorithm, and communication protocols targeting efficient energy usage as their design goal. In this article, the authors analyzed the energy cost of a fully operational WSN.

Authors proposed highly referenced, energy aware protocols for deploying nodes and running the network for the application of toxic gas detection in oil refineries. Leakage of toxic gas from the oil refinery is monitored through the proposed model. Self-organization refers the neighbour discovery and interest dissemination. A comprehensive analytic and simulation model is provided depending on which the lifetime of the network is determined. The proposed model considered few concerns such as multi-hop communication, time synchronization, distributed sleeping schedules and node density. Rest of the paper is structured as follows: in section 2, we discuss some of the related works. In section 3, provides the background

details of the toxic gas detection in oil refineries. In section 4, to discuss the proposed COA-LEACH energy model for spotting leakage of toxic gas and the same is evaluated and analyzed in section 5. Finally, section 6 concludes the paper with ideas to enhance the model in the future.

II. RELATED WORK

Low energy consumption became a major research field since most WSNs requires low energy consumption. Research scholars focus on areas of routing, one-hop neighbour discovery, and data aggregation to reduce energy consumption through energy-efficient protocols and algorithms. Various protocols and algorithms were found for the different reasons. Some of the related works were discussed in this section.

Routing was one of the major areas where much research was undertaken to reduce the energy consumption in order to increase the lifetime of the sensor networks. Authors of [4] proposed Cell based Energy Density Aware (CEDA) protocol to reduce the amount of energy consumed during sensor data flooding by dividing a sensor field into uniform cells. Energy density parameter of CEDA protocol was used to avoid packet flows to the subareas where the sensor nodes had lower residual energy. This property made CEDA to monitor all substations for the long period of time. Along with the reduction in energy consumption, throughput is also achieved using opportunistic routing. This technique allows the nodes to be selected based on the closeness to destination and arrange the nodes according to priority. This method of routing, discard packets if it reached the lower-priority nodes. One major challenge found by this type packet forwarding was selecting and prioritizing the nodes, which consumed more energy. This challenge is overthrown by the scholars of by an energy-efficient opportunistic routing strategy (EEOR). Apart from opportunistic routing, multipath routing was also used to improve the throughput, but it consumed more energy. Therefore, it became essential to reduce the energy consumption in multipath routing. As a solution to this problem, research scholars of an article in discovered network coding-based multipath routing (NCMR). It employed braided multipath and network coding scheme. This combination made NCMR to consume less energy through decreasing the required number of routes and transmission. Robustness and effectiveness of the NCMR was found from the analysis of experimental results that depicted it was suitable for WSN.

All existing routing protocol chose the path with minimum energy to forward packets to sink nodes. Routing in such a way causes the residual energy among the nodes of WSN to get distributed unevenly and results in network partition. So to balance the energy distribution authors of designed an Energy Balanced Routing Protocol (EBRP). This protocol utilized depth, energy density and residual energy to forward packets through dense energy area towards sink node, thereby safeguard the low residual

energy node. In addition to that selecting, a path having high transmission bandwidth and delivery rate can be used to reduce power consumption. With these concept authors of proposed a power-aware routing protocol named MTPCR, which finds path for routing. This method of routing reduces the power consumption during data transmission.

Apart from routing, neighbour discovery was also an area where energy is consumed highly. Because of time-varying environment and mobility causes, the node's neighbourhood to change frequently, consequently it added difficulty in detecting the neighbour. Due to this reason neighbour detection became an important enabler of energy conservation and network connectivity. Therefore, efficient neighbour detection mechanisms were required to optimize the energy used. In an algorithm based on asynchronous, probabilistic neighbour discovery was presented to permit every node in the network to develop an incomplete list of neighbours. The analysis of this method showed that the number of neighbour discovered is maximized in a fixed time with less energy. Another solution was found in to discover neighbours, which was targeted at synchronized low duty-cycle in medium access control (MAC) to reduce the cost of network scans. It was consummated by distributing the schedule information for nodes in MAC protocol beacons. Furthermore, it used this information to establish a new communication link. Moreover, energy reduction was carried out through optimizing the beacon transmission rate. A new paradigm named compressed neighbour discovery was proposed in that enabled the nodes of WSN to discover simultaneously immediate neighbours using single-frame of transmission.

This detection method used on-off signatures to find neighbours. Several research works were undertaken to tackle the problem of energy consumption in WSN from various angles. A vast analysis of different routing protocols was taken in to find their energy consumption. The results in was evident that consumption of energy through routing was not indicated the overall energy-efficient performance. Authors of the same showed that topology information plays a very important role, and the protocols that functioned in licentious mode were better prepared to handle heavy traffic loads. In researcher focused on the topology and also found the problem in adjusting the node's transmit power in a multi-hop network, through which desired topology in a way that it consumes less energy. Likewise, in to increase the lifetime of network in multi-hop wireless network an Energy Efficient Domination Tree Construction (EEDTC) algorithm was used to construct a dominating tree which served as communication backbone. EEDTC performed well on the energy consumption since it used only low message complexity. Detection in WSN was also a research area for reducing the energy consumption. For energy-efficient detection, a protocol called LRI and CSI Based Access (LCBA) was discovered. This protocol was traded

off between LRI and CSI to reduce overall transmission energy.

Gathering raw data in WSN was a hurdle because a very large amount of data should be transmitted over the network. This affects not only the energy consumption, but also diminished the network lifetime. Data aggregation was accepted as an essential pattern for efficient energy. Few works related to the energy-efficient data aggregation was present in this subsection. A data aggregation tree was constructed in with the motivation to minimize the overall energy cost of the sensor nodes that were subjected to latency constraints. Root in this tree was called as the sink node, i.e. data center and other nodes in the tree represent the sensor nodes. Different approach was carried out in that only some of the nodes in WSN were allowed to aggregate the data. Distributed scheduling algorithm was developed in, which has the responsibility to decide on when a particular node should aggregate the data. This approach also removes the redundant data so that the amount of data transmission got reduced through which it efficiently reduced the amount of energy consumption. Experimental result and analysis in was an evident that if message transmission is reduced up to 85% which in turn prolongs the lifetime of network by 92%. Authors of considered the mobile agent-based data aggregation and energy-efficient data collection in WSN. They proposed an Itinerary Energy Minimum Algorithm (IEMA) based framework for energy- efficient data aggregation and a solution for multi-agent itinerary planning (MIP). It works well than the existing methods.

A framework is adopted two different mechanisms to reduce the energy consumption. One to implement data gathering at the application layer and the other one for sleeping mechanism that to be designed as medium access control layer. Simulation result in this article denotes that the framework worked significantly than the conventional MAC layer or data aggregation approaches. A generic Data compression technique named compressed data-stream protocol (CDP) was proposed in to significantly support data aggregation in WSN.

III. BACKGROUND

Various toxic gases are emitted during oil exploration and refinery processes as a product or by-product like Ammonia, Sulfur Dioxide, etc. Among those gases, few gases are considered to be useful though it is dangerous for human life causing health and corrosion problems. Such gases are transported in pipelines to the required workstations from the refineries. The main anxiety at this stage is the perspective of leakages may cause ruthless impact on the human being and on environment causing ecological imbalance. Leakage may occur either in one of the following way.

1. Pipeline repair
2. Due to the deformations caused by corrosion, material flaws, earthquakes or because of intentional damage

Such leakages can be found earlier without any human intervention using WSN. The sensing and data gathering property of WSN made it applicable to the toxic gas detection application.

A.Existing Detection System

High-risk and value, and accessing difficulty of the pipeline made the management as a challenging one. The detection system for pipeline consists of both stationary and portable sensors. Stationary sensor system includes signal cables, power, sensors and a control station where the data sensed of sensors are processed. The maintenance cost of such sensing network is high, so it may not satisfactorily cover the sensing field. Because of the coverage problem, works carry portable sensors during inspection. The main drawback of such a network is that it senses and reports the control system independently. It does not correlate and gather the information from spatially distributed nodes. This makes the detection of leakage tedious since the leakage information sensed from an individual node may be either due to actual leakages or diffusion on air of the gas. It is difficult to differentiate the reasons mentioned above for leakage.

B.Sensor Selection and Calibration

A wide range of sensing technologies such as Catalytic, Capacitive, Infrared Photoionization, and Semiconductor are available in the market. Among these varieties IR, electrochemical and catalytic are the popular for measurement for the past years. For detection of toxic gas, it is suggested to use electrochemical sensors. The detection equipment performs a relative measurement. So calibration is required for accurate measurement. For toxic gases, it is recommended to use pre- calibration or scheduled calibration.

C.Threshold and Response Time

Threshold of an alarm depends on the exposure occupational limit of gas, which also varies from country to country. Limit values also differs depending on short or long term exposures. Whereas the general limit is 10ppm for short- term exposure response time is one of the major and critical metric for leakage detection. The response time will be decided based on the sensor node's response speed, processing time, and transmission. Nominal time is set between 20 to 30 seconds, but most refineries set 60 seconds as upper limit.

IV. PROPOSED METHOD

The main aim of this article is to propose an efficient energy cost modeling in WSN. Our approach is depicted in figure 1, which explains the overall process of our work.

A.Network model and Deployment

Energy consumption and lifetime of network is based upon the network model that establishes the basic assumption on topology, density of node, distribution and connection of

node. Furthermore, it defines the sensing task of the network. Deployment denotes the arrangement of nodes in an area where the sensing process carried out. It is considered as one of the most fundamental issues in monitoring or sensing the given area. Quality, cost, and capability of monitoring are based upon the deployment of wireless sensor nodes. There are 3 basic types of monitoring.

1. Spot monitoring
2. Area monitoring
3. Fence monitoring

If the pinpoint positions of the area where sensing task is to be accomplished is clearly known then spot monitoring can be carried out. This monitoring strategy uses only a limited number of sensor nodes since it knows the exact location of sensing spots. This type of monitoring requires the more time and knowledge about the field. Whereas, other two monitoring techniques saves time in finding the pinpoints of the spots where leakage occurs. In area monitoring sensors should be deployed where there the gas may spread across the area. This technique requires huge amount of sensors. Likewise, fence monitoring also required to be deployed at the outer limit. This is more suitable for security related applications.

Traditional wired sensor networks widely use spot monitoring techniques while it is not applicable to the wireless sensor network since it has coverage problem. Coverage depends on the density and deployment of the network. For spot monitoring only the potential area of leakage should be monitored. This consumes less energy and also the safest method. Figure 1 portrays the deployment of sensor nodes.

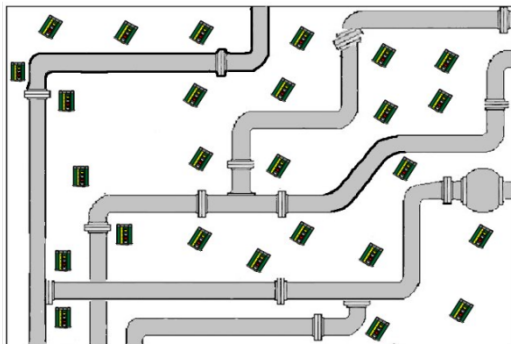


Fig.1 Deployment of sensor nodes

B. COA-LEACH Energy model

The communication protocols we engage to launch the wireless sensor networks are the C-MAC, for medium access control for affirming auto arranging and routing. Hop count is a necessary execution parameter and suggests how much hops a message is operated in the mean for a devoted far in a network. The hop count estimation is simple if the topology is deterministic. However, for random network model, more probability and statistic

theories are required as a group. To calculate the minimum hop count, we determine the distance S between two random nodes and divide it by transmission range R . All the data packets in C-MAC are unicast, except the interest dissemination. The unicast packets cause control overhead because of the RTS/CTS/ACK packets. In order to manipulate the adaptive listening energy cost it is helpful to determine the number of neighbours that are likely to catch the RTS/CTS message. This can be computed by taking the communication coverage overlaps between two random neighbours. If two nodes are in communication range then their coverage and transmission intersect. To estimate the energy consumption of toxic gas detection network we framed the COA-LEACH energy model. A threshold value is set to decide whether the range for communication should be selected or discarded. If the energy consumption exceeds the threshold value then the range that is selected for communication is discarded. Otherwise, the range can be set for transmission of data.

C. Data Aggregation

The data traffic can be reduced in the WSN through transferring the data only when the intensity of the toxic gas reaches a maximum level (the level is predefined depending on the industry and country). This requires the aggregation of data. The main goal of the data aggregation is to collect the data in energy efficient manner in order to improve the network lifetime. The general work flow of the data aggregation is as shown in the figure 4. In our work in-network aggregation is taken, which gathers the information through multi-hop network and process the data at the intermediate nodes. Here the packets received from different sources are merged at the intermediate node and the data are computed to detect the redundancies. The redundant data packet are removed by the intermediate nodes, there by reduces the number of packets routing towards the destination. This implicitly lessens network traffic and number of packets to be processed at the destination node.

V. EXPERIMENTAL RESULTS

In this section, authors provide an experimental analysis of the proposed energy model (i.e. COA-Leach). They used energy consumption, delay, loss, PDR, throughput, energy utilization as their parameter to measure the performance of COA-Leach.

A. Energy Consumption

Amount of energy consumed by the network to sense, process, and transmit the result to the desired destination is analyzed. Each node in the network consumes some amount of energy to process the sensed data and to transfer it. Following figure depicts the energy consumption rate as the processing proceeds. Energy consumption is measured in Joules for various intervals of time in milliseconds. The figure also depicts the comparison

between the two energy models Leach the existing model and COA-Leach the proposed model. It is evident from the figure that the energy consumed by our proposed energy model is lesser than the existing model.

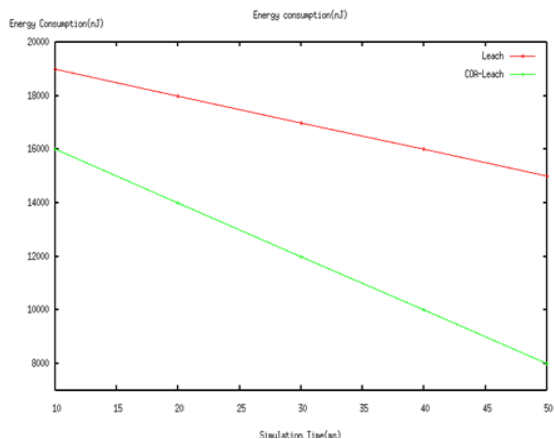


Fig.2 Energy consumption

B. Bandwidth vs. Energy

Bandwidth and energy efficiencies are the primary resource constraints. For bandwidth, authors consider the total Mb used between the source and destination node. Amount of energy consumed in order to transfer the sensed data is measured in nano Joules (nJ). Authors investigate the tradeoff between the bandwidth and energy efficiency of the network into a single metric. Figure 3 represents the impact of bandwidth and energy. It also expresses the comparison between leach model and the COA-leach model.

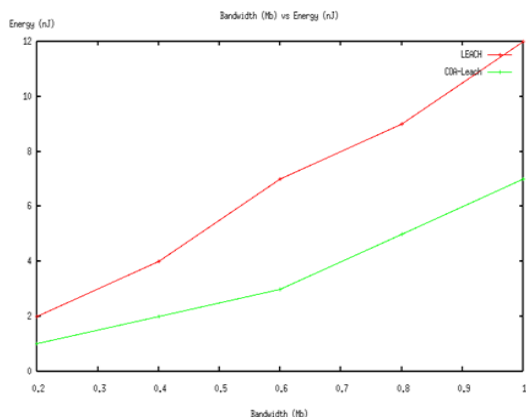


Fig.3 Bandwidth vs. Energy

C. End-to-End Delay

This delay personifies the time taken to deliver sensed data from the sensor node (source) to destination across the network. This depends on the traffic characteristics of the source. Initially, when the simulation starts there is very less traffic in the network the delay for delivering the packets among the source, and destination are lesser. But, when the process precedes traffic increases thereby the time taken to deliver packets also increases. Figure 4 exploits the delay in transferring the sensed data from

the source to the destination for both the existing and proposed energy model. It shows that the delay in transferring the data packet for COA-Leach is lesser than the existing standard Leach technique. Delay is expressed in milliseconds (ms).

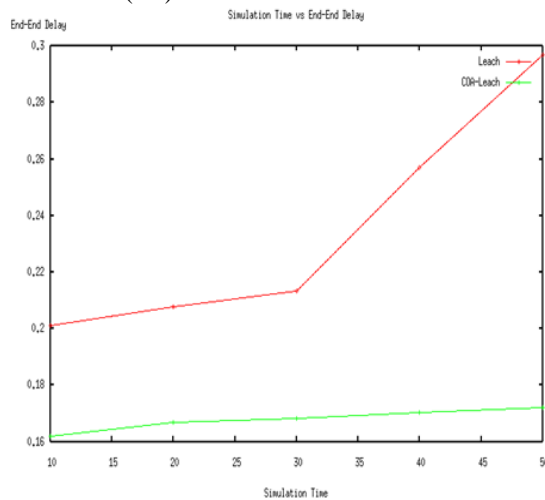


Fig.4 End-to-End delay

D. Packet-Delivery Ratio(PDR)

The ratio between the number of packets sent by the source, and the packets received by the sink node is the PDR. PDR is always higher for lighter traffic, whereas when the traffic increases the delivery ratio is decreased. Authors used PDR as a metric to find the efficiency of Leach and COA-Leach method. Packet delivery rate in terms of percentage for both the proposed and existing is portrayed in the figure 5. Packet delivery rate of the COA-Leach is higher even in high traffic, which is illustrated in the graph presented in following figure 5.

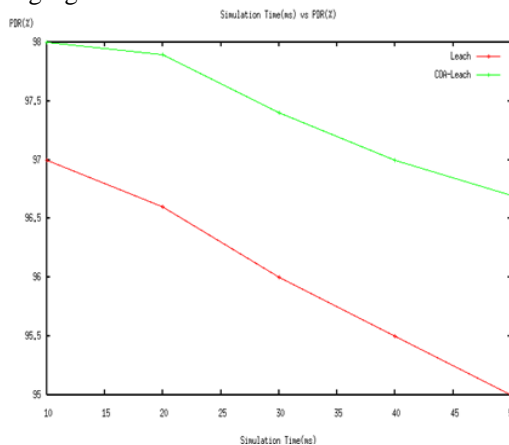


Fig.5 Packet Delivery Ratio

E. Packet Loss

Packet size and packet loss are directly proportional to each other. If packet size is higher, then the computation of the header overhead is reduced, but it adversely affects the loss rate. Therefore, the Quality of Service (QoS) is highly depended on the packet loss.

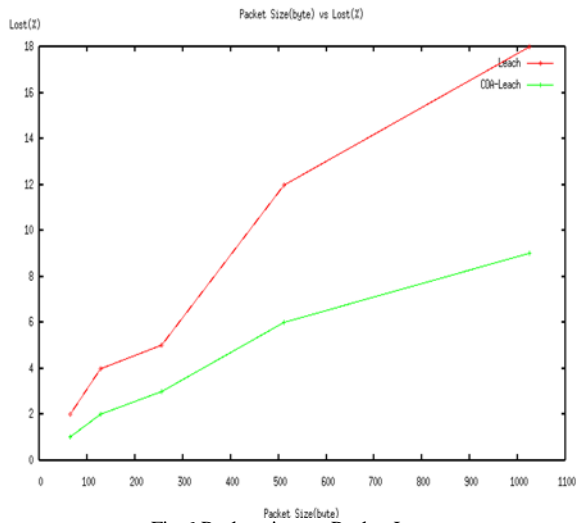


Fig.6 Packet size vs. Packet Loss

Authors analyzed their proposed work to find the packet loss the results are compared with Leach. Figure 6 denotes the percentage of packet loss corresponding with the size of the packet and explains that COA-Leach performs much well than the Leach.

F.Throughput

Throughput is the average successful rate of message delivery. This plays an effective metric to analyze the performance of the proposed and existing energy model. The technique that has the higher throughput is considered as a best method. Following figure shows the throughput study of two energy models.

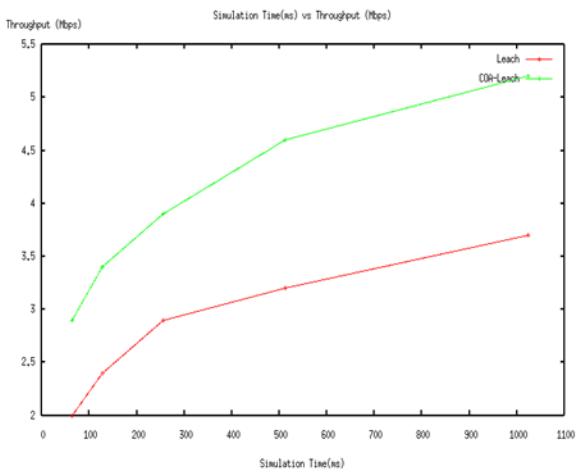


Fig.7 Throughput

It is apparent from the graph in figure 7 that the throughput of COA-Leach is greater than the Leach method. Therefore, it is explicit that the method proposed by the authors performs better than the existing techniques. Residual energy of the node represents the remaining energy present after the monitoring process. Pause time is the idle time for which the mobile nodes in the wireless sensor network are in stable position. A graph in figure 10 denotes the remaining energy of all the nodes in the

network for different pause time. The residual energy is measured using nJ.

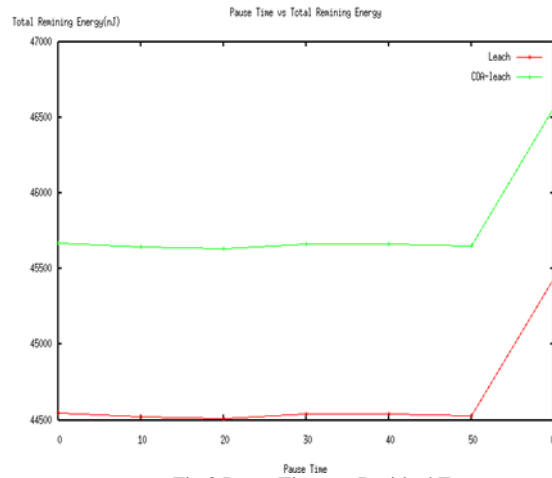


Fig.8 Pause Time vs. Residual Energy

Figure 8 shows average energy used by all the nodes on using the COA-leach and Leach methods. Amount of energy consumption is more considered in WSN since they are battery powered, and power dissipation higher thereby reduces the lifetime of the network.

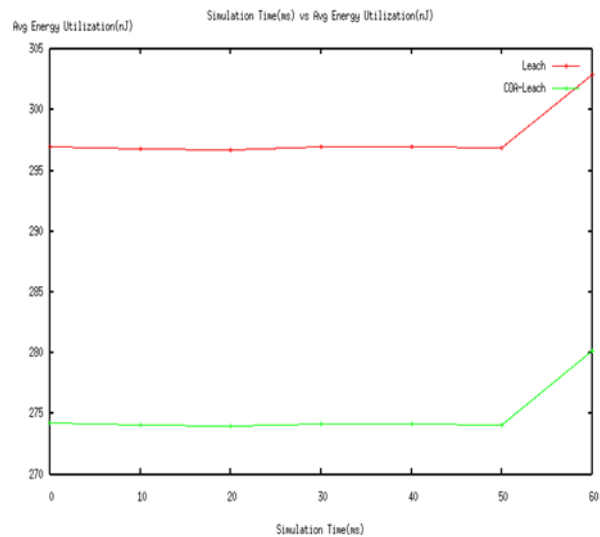


Fig.9 Energy Utilization

It is obvious from the graph of figure 9 that the amount of energy consumed by Leach is higher than the COA-Leach technique. Along with this, a graph in figure 10 denotes the variance of energy in the network, which is measured in nJ.

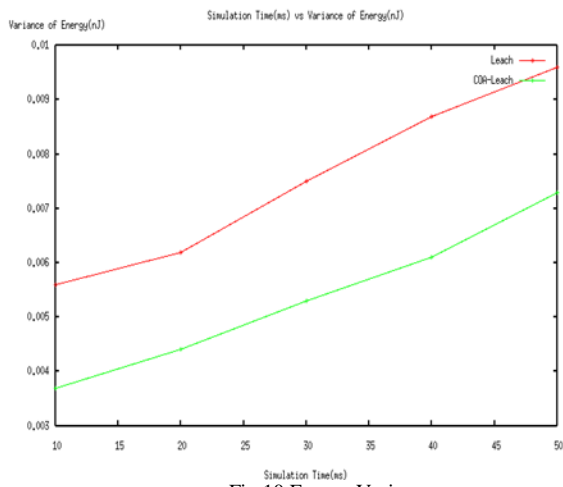


Fig.10 Energy Variance

VI. CONCLUSION

Since a decade, WSN have been envisioned to support numerous monitoring applications. In which, energy efficient routing is much consequential to enhance the lifetime and stability of the system. Focusing that, COA-LEACH has been proposed in this paper for determining energy cost. Here, network deployment is made with Poisson distribution that covers maximal area effectively. Further, the proposed mechanism evaluates the energy cost for various paths that involves in packet transmission from

source to destination. With that evaluation, adept path is predicted for packet transmission based on the computed threshold value. Consecutively, the intermediate nodes of the selected path perform data aggregation in order to remove the data redundancy, thereby improves the overall network lifetime. The experimental results show that COA-LEACH performs better than the traditional LEACH model.

REFERENCES

- [1] Ramanathan R, and Rosales-Hain R, "Topology control of multihop wireless networks using transmit power adjustment," in the proceedings of Conference of the IEEE Computer and Communications Societies, vol. 2, pp. 404-413, 2000.
- [2] Mainwaring, A., Culler, D., Polastre, J., Szewczyk, R., and Anderson, J., "Wireless sensor networks for habitat monitoring," in the proceedings of ACM international workshop on wireless sensor networks and applications, pp. 88-97, 2002
- [3] Amer Filipovic, and Amitava Datta, "Building Blocks of Energy and Cost Efficient Wireless Sensor Networks," in the Lecture Notes in Computer Science, vol. 2920, pp. 218-233, 2004
- [4] Jae Young Choi, Hyung Seok Kim, Iljoo Baek, Wook Hyun Kwon, "Cell based energy density aware routing: a new protocol for improving the lifetime of wireless sensor networks," in the journal of Computer Communications , vol. 28, issue 11, pp. 1293-1302, July 2005.
- [5] Yi Hu, Nuo Yu, and Xiaohua Jia, "Energy efficient real-time data aggregation in wireless sensor networks," in the proceedings of international conference on Wireless Communications and mobile computing, pp.803-808, 2006.